

**PRODUCT
DATASHEET**



CLM1612P2815 Device(Preliminary)

CLM1612P2815 Device

Description

Current Limiting Module (CLM) is a chip type surface mountable device that can protect against both overcurrent and overcharging. It comprises a fuse element to ensure stable operation under normal electrical current and to cut off the current when overcurrent occurs. It also comprises a resistive heating element that could be used in combination with a voltage detecting means, such as IC and FET. When overvoltage is detected, the heating element is electrically excited to generate heat to blow the fuse element to achieve overvoltage protection.

Features

- Halogen-free
- Surface mountable
- Overcharging protection
- Fast response time
- Overcurrent protection

Application

- Notebook
- Tablet PC
- Cell phone
- Automotive applications
- Camera
- Printer
- Ultrabook
- Security systems





Agency Approval and Environmental Compliance

| Agency | File Number | Regulation | Standard |
|---|-------------|---|---------------------|
|  | E331807 |  | IEC 61249-2-21:2003 |
|  | TA 50428400 | | |

RoHS Directive: Compliance (This product complies with RoHS exemption requirements, since the high melting temperature solder and electronic ceramic parts include Lead.)

Electrical Specifications

| Part Number | I _{rated} (A) | Cells in series | V _{max} (V _{dc}) | I _{break} (A) | V _{OP} (V) | Resistance | | Agency Approval | |
|--------------|---------------------------|--------------------|--|---------------------------|------------------------|----------------------------|---------------------------|---|---|
| | | | | | | R _{heater} (Ω) | R _{fuse} (mΩ) |  |  |
| CLM1612P2815 | 15 | 7 | 36 | 50 | 16.5 ~ 31.5 | 28.4 ~ 40.8 | 1.0 ~ 3.0 | ✓ | ✓ |

CLM1612P2815 Device

Electrical Characteristics

| | |
|------------------------|---|
| Current Capacity | 100% x I_{rated} No Melting |
| Cut Time | 200% x I_{rated} < 1 min |
| Interrupting Current | 5 x I_{rated} , power on 5 ms, power off 995 ms, 10000 cycles No Melting |
| Over Voltage Operation | In operation voltage range, the fusing time is <1min. |

Note on Electrical Specifications & Characteristics

■ Vocabulary

- I_{rated} = Current carrying capacity that is measured at 40°C thermal equilibrium condition.
 I_{break} = The current that the fuse element is able to interrupt.
 V_{max} = The maximum voltage that can be cut off by fuse.
 V_{op} = Range of operation voltage.
 R_{heater} = The resistance of the heating element.
 R_{fuse} = The resistance of the fuse element.

Cells in series = Number of battery cells connected in series in the circuit for CLM device to protect.

- Value specified is determined by using the PWB with 2mm*2oz copper traces, AWG18 covered wire, and 0.6mm glass epoxy PCB.
- Specifications are subject to change without notice.

WARNING

■ General

- Before and after mounted, the ultrasonic-cleaning or immersion-cleaning must not be done to CLM device. The flux on element would flow, and it would not be satisfied its specification when cleaning is done. In addition, a similar influence happens when the product comes in contact with cleaning-solution. These products after cleaning will not be guaranteed.
- Silicone-based oils, oils, solvents, gels, electrolytes, fuels, acids, and the like will adversely affect the properties of CLM devices, and shall not be used or applied.
- Please Do Not reuse the CLM device removed by the soldering process.
- CLM devices are secondary protection devices and are used solely for sporadic, accidental over-current or over-temperature error condition, and shall NOT be used if or when constant or repeated fault conditions (such fault conditions may be caused by, among others, incorrect pin-connection of a connector) or over-extensive trip events may occur.
- Operation over the maximum rating or other forms of improper use may cause failure, arcing, flame and/or other damage to the CLM devices.
- The performance of CLM devices will be adversely affected if they are improperly used under electronic, thermal and/or mechanical procedures and/or conditions non-conformant to those recommended by manufacturer.
- Customers shall be responsible for determining whether it is necessary to have back-up, failsafe and/or fool-proof protection to avoid or minimize damage that may result from extra-ordinary, irregular function or failure of CLM devices.
- There should be minimum of 0.1mm spacing between CLM and surrounding compounds, to maintain the product characteristics and avoid damage other surrounding compounds.
- This product is designed and manufactured only for general-use of electronics devices. We do not recommend that it is used for the applications Military, Medical and so on which may cause direct damages on life, bodies or properties.


CLM1612P2815 Device

Thermal Derating Characteristics


| | | | |
|-----------------------------|------|------|------|
| Ambient Temperature (°C) | 25 | 40 | 60 |
| Recommend Rated Current (A) | 18.0 | 16.0 | 13.5 |

Cut Time by Heater Operation

■ Various heater wattage at 25°C ambient temperature.

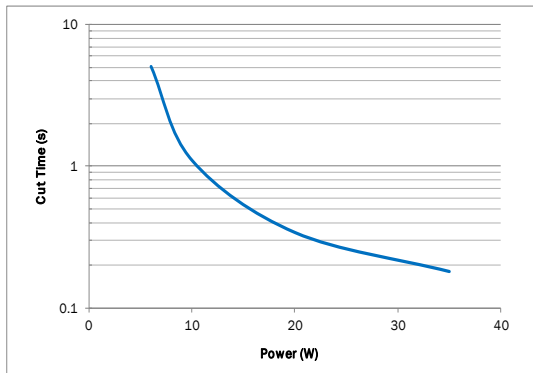


■ Constant heater wattage at various ambient temperature.

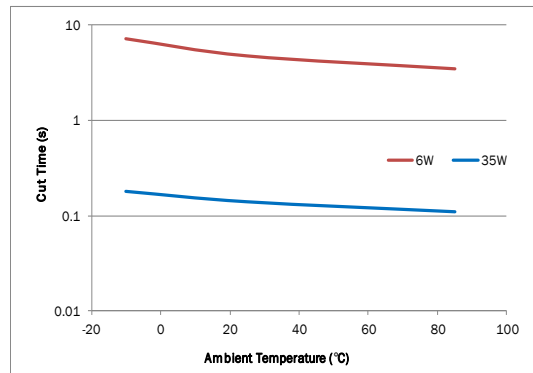


Cut Time by Current Operation

■ Various interrupting current at 25°C ambient temperature.

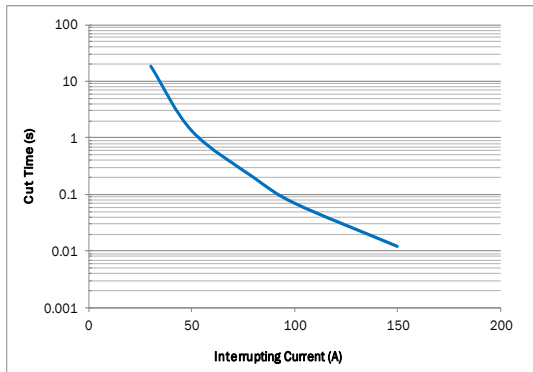


■ Constant 2x rated current at various ambient temperature.

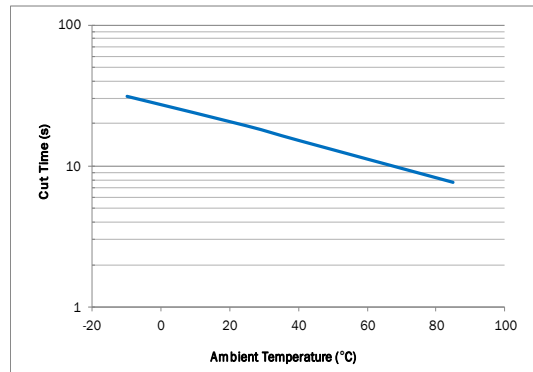


CLM1612P2815 Device

Device Circuit

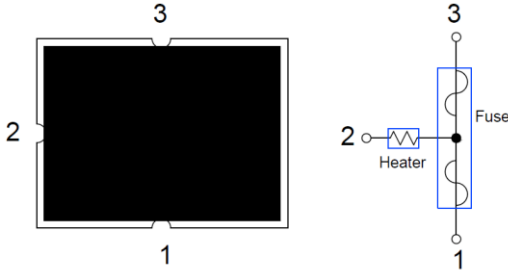

Physical Dimensions (mm.)

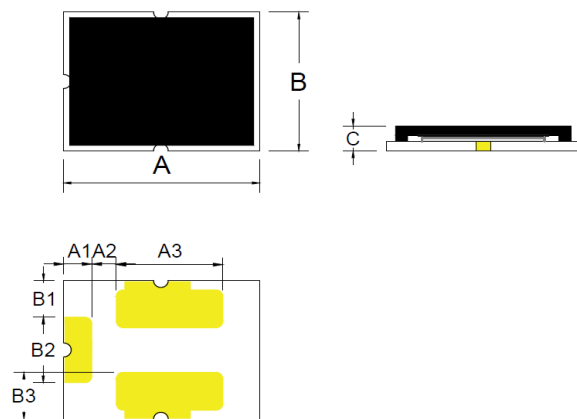


| | |
|----|------------|
| A | 4.00 ± 0.2 |
| B | 3.00 ± 0.3 |
| C | 0.90 max |
| A1 | 0.58 ± 0.1 |
| A2 | 0.50 ± 0.1 |
| A3 | 2.20 ± 0.1 |

| | |
|----|------------|
| B1 | 0.80 ± 0.1 |
| B2 | 1.44 ± 0.1 |
| B3 | 1.03 ± 0.1 |

Part Number System


CLM 1612 P 28 15

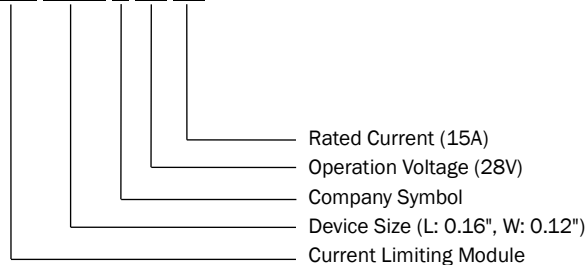

Environmental Specifications

| | |
|-----------------------|---|
| Storage Temperature | 0~35°C, ≤ 70%RH 3 months after shipment |
| Operating Temperature | -10°C to +65 °C |
| Hot Passive Aging | 100±5°C, 250 hours No structural damage and functional failure |
| Humidity Aging | 60°C±2°C, 90~95%R.H. 250 hours No structural damage and functional failure |
| Cold Passive Aging | -20±3°C, 500 hours No structural damage and functional failure |
| Thermal Shock | MIL-STD-202 Method 107G +125°C / -55°C, 100 times No structural damage and functional failure |

Board and Solder Layout Recommend (mm)




| | |
|------------------|-----------------|
| Material | Glass Epoxy PCB |
| Base Thickness | 0.6mm |
| Copper Thickness | 0.07mm |
| Covered Wire | AWG18 |

| | |
|----|------------|
| A1 | 1.20 ± 0.1 |
| A2 | 1.55 ± 0.1 |
| A3 | 2.40 ± 0.1 |


| | |
|----|------------|
| B1 | 1.20 ± 0.1 |
| B2 | 1.60 ± 0.1 |
| B3 | 1.55 ± 0.1 |
| B4 | 0.90 ± 0.1 |
| B5 | 1.55 ± 0.1 |

Part Marking System

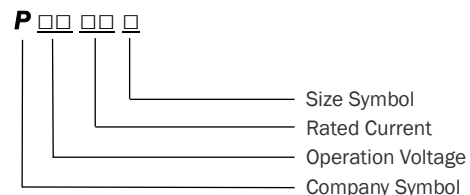

CLM1612P2815 Device

Soldering Parameters

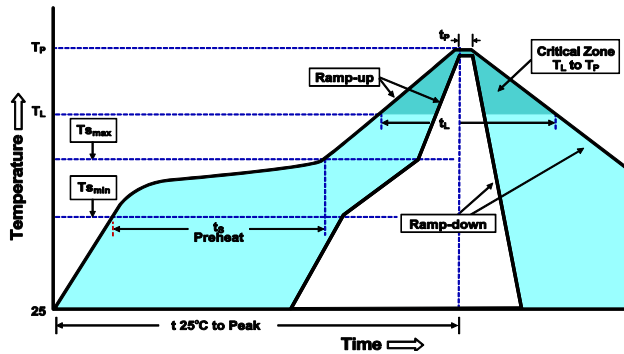


| | |
|---|------------------|
| Average Ramp-Up Rate ($T_{s_{max}}$ to T_P) | 3°C/second max. |
| Preheat | |
| -Temperature Min ($T_{s_{min}}$) | 150°C |
| -Temperature Max ($T_{s_{max}}$) | 200°C |
| -Time ($T_{s_{min}}$ to $T_{s_{max}}$) | 60-120 seconds |
| Time maintained above: | |
| -Temperature (T_L) | 217°C |
| -Time (t_L) | 60-105 seconds |
| Peak Temperature (T_P) | 255°C |
| Time within 5°C of actual Peak | |
| Temperature (t_P) | 5 seconds max. |
| Ramp-Down Rate | 6°C /second max. |
| Time 25°C to Peak Temperature | 8 minutes max. |

Note 1: The temperature shown above is the top-side surface temperature of the device.


Note 2: If the soldering temperature profile deviates from the recommended profile, devices may not meet the performance requirements

Tape & Reel Specification (mm.)

Devices are packaged per EIA481 and EIA-2 standard

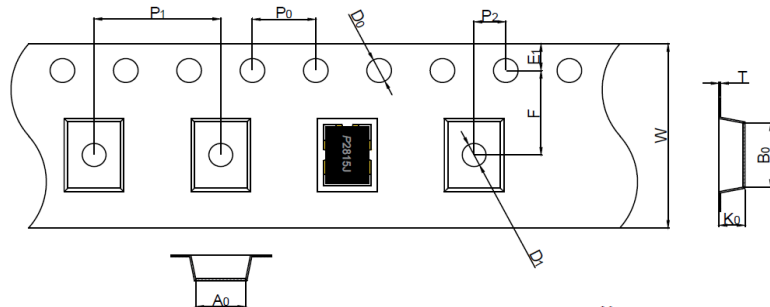

| | |
|----|-------------|
| W | 12.0 ± 0.30 |
| F | 5.50 ± 0.05 |
| E1 | 1.75 ± 0.10 |
| D0 | 1.55 ± 0.05 |
| D1 | 1.50 ± 0.10 |
| P0 | 4.00 ± 0.10 |
| P1 | 8.00 ± 0.10 |
| P2 | 2.00 ± 0.10 |
| A0 | 3.32 ± 0.10 |
| B0 | 4.32 ± 0.10 |
| T | 0.23 ± 0.05 |
| K0 | 1.30 ± 0.10 |

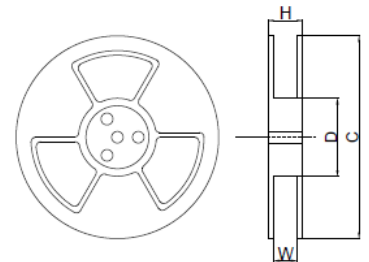

| | |
|---|-------------|
| H | 17.4 ± 1.0 |
| W | 13.4 ± 1.0 |
| D | Ø99.0 ± 0.5 |
| C | Ø330 ± 1.0 |

Packaging Quantity

| Part Number | Tape & Reel Quantity |
|--------------|----------------------|
| CLM1612P2815 | 5000 |